

4MP Network LPR Camera (Vari-Focal)

N9L-4RAL



Key Features

- 4MP Bullet Housing
- 10 to 50 mm Motorized Lens
- License Plate Recognition Speed up to 60 kmh (37 mph)
- IR Distance up to 98 ft
- ANPR with 99% Accuracy

Certifications and Compliance

- NDAA Compliant
- FCC
- IC
- UL

Learn More



Learn more about this product's key technologies.

View all compatible accessories for this product.

Overview

The **N9L-4RAL** is part of Luminys's N9 series of specialty security devices. Designed to improve operations and go beyond today's highest security standards, this LPR camera provides an efficient, cost-effective way to manage vehicle access and traffic flow at key access points.

The camera's intelligent algorithms can accurately identify vehicle details. The LPR can categorize the type of vehicle (large bus, large truck, medium truck, sedan, van, small truck, medium bus, SUV, MPV, pickup truck) and if there are front-seat occupants. LumiTrajectory captures and displays the vehicle's license plate number and path through the monitored area. The camera can recognize plates from the United States and Canada and up to 12 vehicle colors (gray, black, white, silver, blue, green, purple, red, orange, pink, brown, yellow).

The Luminys LPR Gate System can automatically manage vehicle access at both entry and exit points. The LPR (license plate recognition) feature can also be used to control gate access based on vehicle identification.

This camera is ideal for vehicle detection and identification in applications such as parking lots, community roads, toll gates, and more.

Specifications

Camera

Luminys Series	N9 Series (Specialty)
Image Sensor	1/1.8-in. 4MP Progressive CMOS
Maximum Resolution	2688 × 1520 (OSD Black Strip Excluded)
Minimum Illumination	0.002 Lux (Built-In Illuminator On)
Number of Illuminators	Six (6) IR Illuminators With Adjustable Brightness
Illuminator Control	Automatic, Manual
Maximum Illumination Distance	Up to 30.0 m (98.4 ft)
Maximum Detection Speed	60.0 km/h (196850.4 ft/h)
Detection Width	6 to 7 m (19.7 to 23.0 ft)
Capture Distance	8.0 to 30.0 m (26.3 to 98.4 ft)
Trigger Mode	Video Detection, I/O Coil
Shutter Mode	Single Shutter
Electronic Shutter Speed	Automatic, Manual 1/25 s–1/10,000 s

Lens

Lens Mount	Module
Iris Type	Automatic (W:1.33—T:1.34)
Lens Type	Motorized Vari-Focal
Focal Length	10 to 50 mm (0.4 to 2.0 in.)
Field of View	Horizontal: 40.55° (W)–9.33° (T) Vertical: 22.7° (W)–5.3° (T) Diagonal: 46.6° (W)–10.63° (T)

Video

Compression	H.265, H.264M, H.264H, MJPEG
Image Encoding Format	JPEG
Stream Capability	Two (2) Streams
Resolution	Main Stream: 4MP (2688×1520), 2MP (1600×1200), 1080p (1920×1080), 720p (1280 × 720) Sub Stream: 720p (1280 × 720), 960H (960× 480), D1 (704 × 480), CIF (352 × 240)
Maximum Frame Rate	Main Stream: 2688 × 1520/1600 × 1200/1920 × 1080/1280 × 720 at 30 fps Sub Stream: 1280 × 720/960 × 480/704 × 408/352 × 240 at 30 fps
Video Bit Rate	H.264/H.265: 4096 to 10240 kbps MJPEG: 8192 to 40960 kbps
Light Balancing	Wide Dynamic Range (96 dB)
White Balancing	Auto, Outdoor, Manual, Partial White Balance, Natural, Street Lamp
Exposure Mode	Manual, Auto
Noise Reduction	3D NR, Video 3D NR, Video Spatial 3D NR, Video Temporal 3D NR
Edge Enhancement	Supported
OSD Overlay	Time, Plate, Vehicle (Color, Type) Vehicle Position, Counterfeit, Checkpoint Direction, Trigger Source, Custom
Image Tampering Prevention	Watermark, Verification Function

Analytics

Vehicle Detection Rate	≥ 99%
Vehicle Recognition Rate	≥ 95%
Vehicle Recognition Attributes	Vehicle Color, Front-Seat Passenger, Licensed/Unlicensed
LumiTrajectory	Displays Plate and Vehicle Path

Audio

Interface	Output: One (1) Channel (RCA port)
-----------	---

Alarm

Event	No SD Card, Insufficient Memory, SD Card Error, Offline, IP Conflict, Illegal Access, Security Exception
Interface	Input: 2-Channel Optocoupler (On/Off) Output: 2-Channel Relay (Can Be Used to Connect Other Devices)

Network

Interface	One (1) RJ-45 (100/1000 Mbps Ethernet) Port, Two (2) RS-485 Ports, One (1) Wiegand Channel
Interoperability	ONVIF (Profile S/T), CGI, SDK
Auto Registration	Supported
Security	Username/Password, MAC Address Binding, HTTPS Encryption, IEEE 802.1x, Network Access Control
Automatic Network Replenishment (ANR)	Supported via Platform/FTP
Storage	Built-In 1 TF Card Port (Max. 128 GB)

Electrical

Power Supply	12 VDC, PoE+
Power Consumption	< 20 W

Construction

Net Weight	3.2 kg (7.05 lb)
Gross Weight	5.2 kg (11.46 lb)
Operating Temperature	-30 to 65 °C (-22 to 149 °F) 10 to 90% RH (Non-Condensing)
Protection Ratings	IP67
Product Dimensions (L × W × H)	497.4 × 121.6 × 130.0 mm (19.6 × 4.8 × 5.1 in.)
Packaging Dimensions (L × W × H)	625.0 × 305.0 × 270.0 mm (24.6 × 12.0 × 10.6 in.)
Installation	Wall, Pole, or Ceiling Mount
Material	Metal and Plastic


Certifications and Compliance

Certifications	FCC, UL, IC
Compliance	NDAA



Dimensional Drawing

mm [in.]

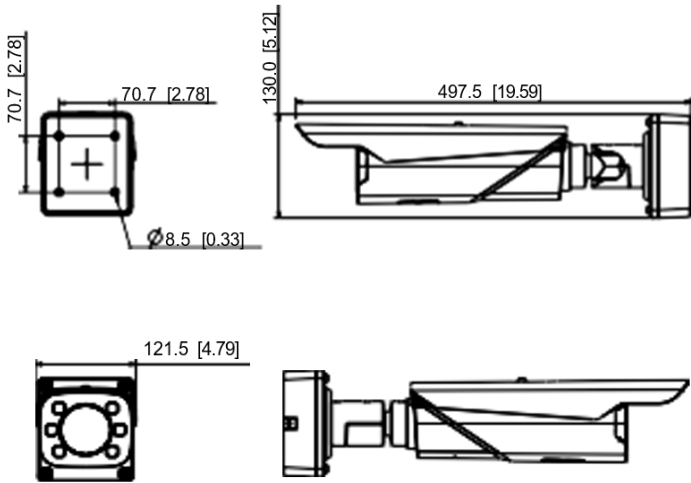

Compatible Accessories

Below are the compatible accessories combinations for this product. All SKUs listed must be purchased to complete an accessory combination. For more information and to see mounting combinations, please view our accessory selector at <https://www.luminyscorp.com/products/accessories>.

Accessory Combination	SKU(s)	Description
Pole Mount	P01	Pole Mount Bracket